



Wi-Fi
Extender Mini
**USER
GUIDE**



CONTENTS

01/

INTRODUCTION

- 1.0 Package Contents 6
- 1.1 System Requirements 6
- 1.2 Features 6
- 1.3 Getting to Know Your Wi-Fi Extender Mini 7

02/

CONNECTING YOUR WI-FI EXTENDER MINI

- 2.0 Setting up Your Wi-Fi Extender Mini 13
- 2.1 Main Screen 15

03/

WI-FI SETTINGS

- 3.0 Overview 25
- 3.1 Primary Network 25
- 3.2 Guest Network 29
- 3.3 IoT Network 30
- 3.4 Wi-Fi Protected Setup 31
- 3.5 Channel Settings 34

04/

CONFIGURING ADVANCED SETTINGS

- 4.0 Using Advanced Settings 39
- 4.1 Reboot 40
- 4.2 Users 41
- 4.3 Factory Default 42
- 4.4 System Logging 43

05/

TROUBLESHOOTING

- 5.0 Troubleshooting Tips 50
- 5.1 Frequently Asked Questions 56

06/

SPECIFICATIONS

- 6.0 General Specifications 60
- 6.1 LED Indicators 60
- 6.2 Environmental Parameters 60

07/

NOTICES

- 7.0 Regulatory Compliance Notices 64

01 /

INTRODUCTION

- 1.0** Package Contents
- 1.1** System Requirements
- 1.2** Features
- 1.3** Getting to Know Your
Wi-Fi Extender Mini

Wi-Fi Extender Mini lets you transmit and distribute digital entertainment and information to multiple devices in your home/office.

Your Extender supports Wi-Fi 6 making it one of the most versatile and powerful Wi-Fi extenders available.

PACKAGE CONTENTS, SYSTEM REQUIREMENTS AND FEATURES

1.0/ PACKAGE CONTENTS

Your package contains:

- Wi-Fi Extender Mini
- Quick Setup Guide

1.1/ SYSTEM REQUIREMENTS

System and software requirements are:

- A computer or other network device supporting Wi-Fi or wired Ethernet
- A web browser, such as Chrome™, Firefox®, Internet Explorer 8® or higher, or Safari® 5.1 or higher

1.2/ FEATURES

Your Wi-Fi Extender Mini features include:

- Support for IEEE 802.11 a/b/g/n/ac/ax networking standards
- Self-organizing Network (SON) offers seamless roaming, band steering, and AP steering to improve the performance of your Wi-Fi network
- Integrated Wi-Fi networking with 802.11a/b/g/n/ac/ax access point featuring:


- Backward compatible to 802.11a/b/g/n/ac
- 2.4 GHz 11ax 2x2
- 5 GHz 11ax 2x2
- 6 GHz 11ax 4x4
- Enterprise-level security, including:
 - Advanced Wi-Fi protection featuring WPA2 & WPA3 Modes and MAC address filtering
 - Wi-Fi Multimedia (WMM) for Wi-Fi QoS (quality-of-service)
- Secure remote management using HTTPS

1.3/ GETTING TO KNOW YOUR WI-FI EXTENDER MINI

1.3a/ FRONT PANEL

The Status LED will be on white and solid when your Wi-Fi Extender Mini is turned on, connected to the internet, and functioning normally.

*Front
Panel
Status
LED*



GETTING TO KNOW YOUR WI-FI EXTENDER MINI

Status LED

Condition Status	LED Color	Wi-Fi Extender Mini
Normal	WHITE	Normal operation (solid) Extender is booting (fast blink) System restart (fast blink)
	BLUE	Pairing mode (slow blink) Pairing successful (fast blink)
	GREEN	Wi-Fi has been turned off (solid)
Issue(s)	YELLOW	No internet connection (solid) Extender is too far from the Router. Poor backhaul signal (slow blink) Extender is too close to the Router. Poor Wi-Fi coverage (fast blink)
	RED	Hardware/System failure detected (slow blink) Overheating (fast blink) System update error (fast blink) WPS pairing failure (fast blink)
Power	OFF	Power off

1.3b/ REAR PANEL

The rear panel of your Wi-Fi Extender Mini has a label that contains information about your device, including the MAC address for the Wi-Fi Extender Mini. The label also contains a QR code that you can scan with your smartphone, tablet, or other camera-equipped Wi-Fi device to allow you to automatically connect your device to your Wi-Fi network without typing in a password (requires a QR code reading app with support for Wi-Fi QR codes).




The rear panel also includes a power plug.

- **Power** - power the Wi-Fi Mini Extender by simply plugging it into an electrical outlet.

GETTING TO KNOW YOUR WI-FI EXTENDER MINI

1.3c/ SIDE PANEL

The side panel has WPS button and reset pinhole.

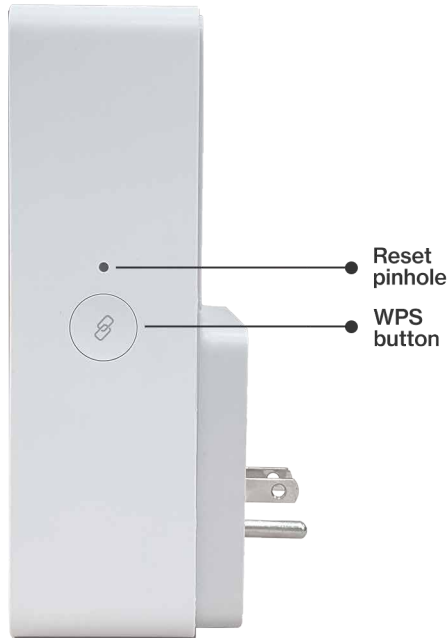

- **WPS Button** - allows quick access to the Wi-Fi Protected Setup (WPS) feature and pairing mode.
- **Reset Pinhole** - allows you to perform device reboot or to reset your Wi-Fi Extender Mini to the factory default settings.
 - To perform a power reset without reverting to factory defaults, stick a straightened out paperclip into the pinhole, press and hold for three seconds.
 - To reset your Wi-Fi Extender Mini to the factory default settings, stick a straightened out paperclip into the pinhole, press and hold for at least ten seconds.

02 /

CONNECTING YOUR WI-FI EXTENDER MINI

- 2.0** Setting up Your
Wi-Fi Extender Mini
- 2.1** Main Screen

Connecting your Wi-Fi Extender Mini and accessing its web-based User Interface (UI) are both simple procedures.

Accessing the UI may vary slightly, depending on your device's operating system and web browser.

SETTING UP YOUR WI-FI EXTENDER MINI


2.0/ SETTING UP YOUR WI-FI EXTENDER MINI


2.0a/ WI-FI INSTALLATION

Make sure your router has an internet connection before setting up the Wi-Fi Extender Mini.

1. Plug the Wi-Fi Extender Mini into a power outlet next to the router.



2. When the light on front is solid yellow, press the  pair button on the router and the Wi-Fi Extender Mini. Both devices will blink blue while pairing.

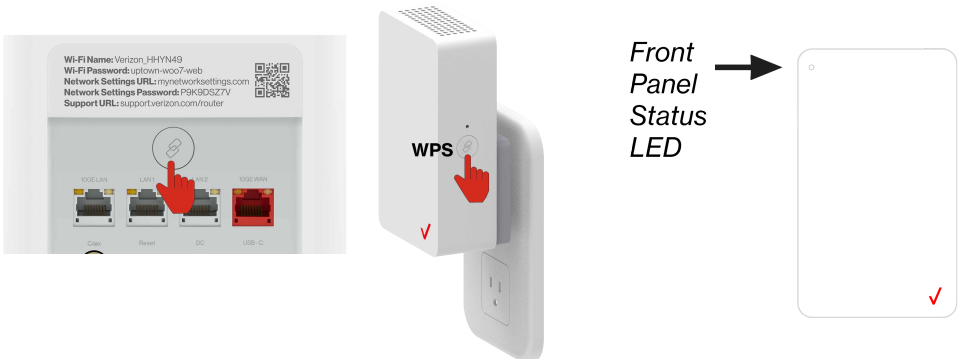

3. Wait until you see a blinking yellow light then unplug the Wi-Fi Extender Mini.
4. Move it to an area between the router and the weak Wi-Fi coverage, then plug it in.

Note: When plugging in the Wi-Fi Extender Mini, ensure there is proper ventilation to all sides and in front of the extender. Do not plug in the unit behind furniture, curtains, or anything that obstructs its air flow.

5. Once the light turns solid white, your setup is complete.

You're all set! Your devices will automatically connect to your Wi-Fi network, there is nothing more to do.

Note: If there is an error during the WPS pairing process, the Status LED slowly flashes red for two minutes after the error occurs, then turns solid yellow indicating no internet connection.

CONNECTING A WI-FI DEVICE USING WPS

For instructions on how to connect devices to Wi-Fi using WPS, refer to section 3.4 "Wi-Fi Protected Setup" on page 31.


SETTING UP YOUR WI-FI EXTENDER MINI

2.1/ MAIN SCREEN


2.1a/ Login

1. Open a web browser on the device connected to your Wi-Fi Extender Mini network.
2. In the browser address field (URL), enter: mynetworksettings.com, then press the **Enter** key on your keyboard.

Alternately, you can enter: <https://192.168.1.1>

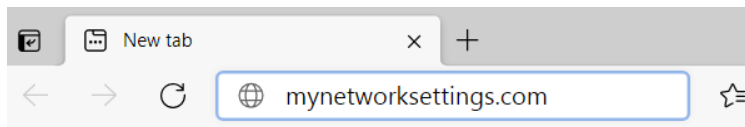


3. You may see a security message warning that **Your connection is not private** when you visit mynetworksettings.com (<https://192.168.1.1>) for GUI management. To get to the login screen, click the **ADVANCED** button, then on **Proceed to 192.168.1.1 (unsafe)** link.

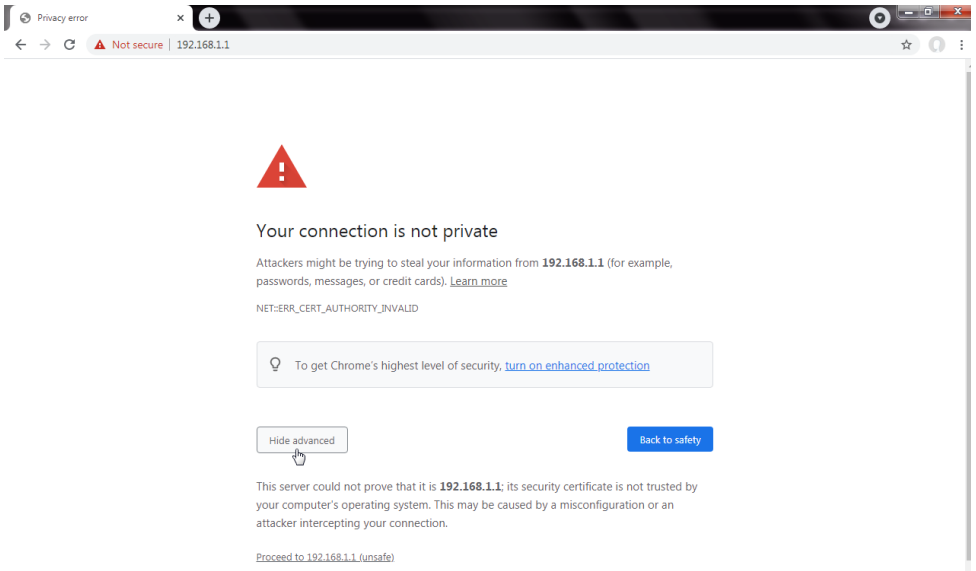


4. The login screen will appear.
5. Enter the password that is printed next to the Admin Password on the label on the rear of your Verizon Router.


MAIN SCREEN

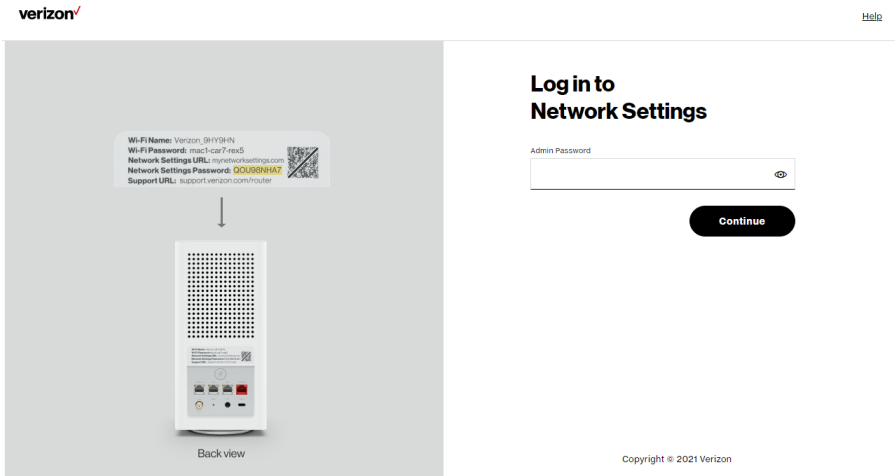

6. When you log into Verizon Router's web management interface, select **Wi-Fi Extender Mini** from the top-left dropdown menu.

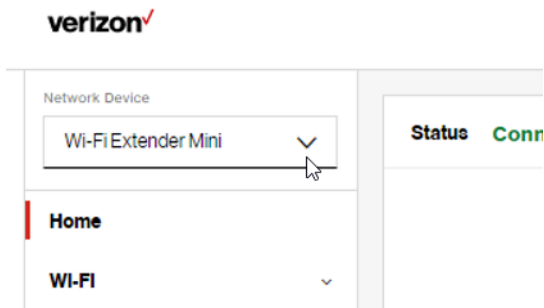

7. The dashboard main page displays the main navigation menu of connection status, Wi-Fi settings, and advanced quick links.

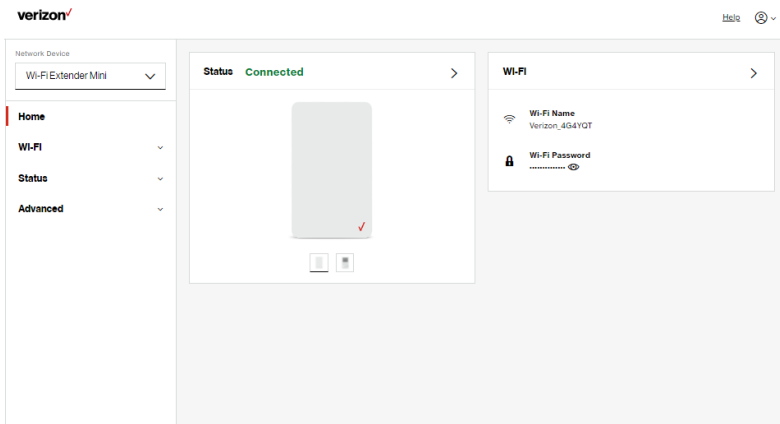

Note: For step-by-step instructions, visit setup.verizon.com/wifiextendermini or scan the QR code below.



2.1b/ MENU

The main menu contains the following configuration options and chapters:

- Status - this chapter
- Wi-Fi - Chapter 3
- Advanced - Chapter 4

MAIN SCREEN

2.1c/ STATUS

Wi-Fi Status

Use the Wi-Fi status feature to view the status for either 2.4 GHz, 5 GHz or 6 GHz of your Extender's Wi-Fi network.

You can view the security settings, such as SSID, WPA security key, Wi-Fi MAC address, and the number of associated clients connected to your Wi-Fi network.

The screenshot displays the Verizon Wi-Fi Status interface for a 'Wi-Fi Extender Mini'. The left sidebar contains navigation options: Home, Wi-Fi (Primary Network, Guest Network, IoT Network, Wi-Fi Protected Setup, Channel Management), Status (Wi-Fi Status, General, Open Source Software), and Advanced. The main content area is titled 'Wi-Fi Status' and includes an 'Auto-refresh' toggle (checked) and a 'Refresh' button. The interface is divided into two sections: '2.4 GHz Wi-Fi (B+G+N+AX)' and '5 GHz Wi-Fi (A+N+AC+AX)'. Each section lists the following settings:

Setting	Value
Wi-Fi Radio:	Enabled
Wi-Fi SSID:	Verizon_4G4YGT
Wi-Fi Security:	WPA2/WPA3 mixed mode
Wi-Fi Channel:	Auto,132
Wi-Fi MAC:	14:69:42:ff:a7:95
Associated Clients:	0

The screenshot shows the Verizon Wi-Fi Extender Mini status page. The left sidebar is expanded to the 'Status' section, with 'Wi-Fi Status' selected. The main content area displays the 'Wi-Fi Status' for the selected device. It includes an 'Auto-refresh' toggle (turned on) and a 'Refresh' button. The settings are organized into two sections: 2.4GHz Wi-Fi and 5GHz Wi-Fi (A+N+AC+AX).

Setting	Value
Wi-Fi Security	WPA2/WPA3 mixed mode
Wi-Fi Channel	Auto,132
Wi-Fi MAC	14.69.42.f#a7.95
Associated Clients	0
5 GHz Wi-Fi (A+N+AC+AX)	
Wi-Fi Radio	Enabled
Wi-Fi SSID	Verizon_4G4VGT
Wi-Fi Security	WPA2/WPA3 mixed mode
Wi-Fi Channel	Auto,11
Wi-Fi MAC	14.69.42.f#a7.93
Associated Clients	0

To view the Wi-Fi security settings:

1. Select **Status** from the left pane.
2. Click **Wi-Fi Status** to view the Wi-Fi settings of your Wi-Fi Extender Mini.

MAIN SCREEN

General

This section displays information such as the device name and model, firmware and hardware versions as well as the MAC Address and IP information of your Wi-Fi Extender Mini.


The screenshot shows the Verizon Wi-Fi Extender Mini status page. The left sidebar contains a navigation menu with the following items: Home, Wi-Fi, Primary Network, Guest Network, IoT Network, Wi-Fi Protected Setup, Channel Settings, Status (highlighted with a red bar), Wi-Fi Status, General, Open Source Software, and Advanced. The main content area is titled 'Status' and shows the following information:

Verizon Extender	
Device Name	E3200-D8F83384C668
Model Name	E3200
Firmware Version	3.10.0-4ng0
Hardware Version	7102
Serial Number	E30900P9800005
MAC Address	D8:F8:53:84:C6:68
System Up Time	0 days/0 hours 42 minutes 2 seconds
Backup Type	Ethernet
Bit Rate	1000Mbps
IPv4 Address	192.168.1.100
IPv6 Address	
Subnet Mask	255.255.255.0
Default Gateway	192.168.1.1

To view:

1. Select **Status** from the left pane.
2. Click **General** to view the device information and network settings of your Wi-Fi Extender Mini.

Open Source Software

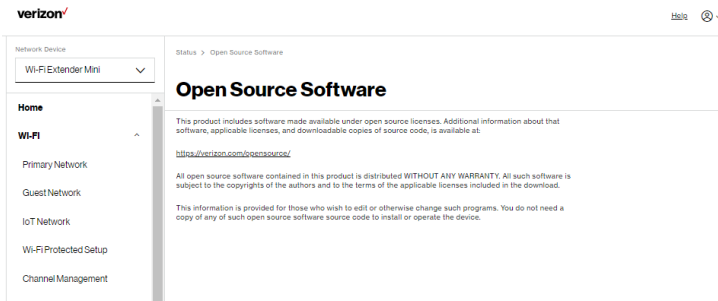

To view:

1. Select **Status** from the left pane.
2. Click **Open Source Software** to view the information.

03 /

WI-FI SETTINGS

- 3.0** Overview
- 3.1** Primary Network
- 3.2** Guest Network
- 3.3** IoT Network
- 3.4** Wi-Fi Protected Setup
- 3.5** Channel Settings

Wi-Fi networking enables you to free yourself from wires, making your devices more accessible and easier to use.

You can create a Wi-Fi network, including accessing and configuring Wi-Fi security options.

OVERVIEW

3.0/ OVERVIEW

Your Mini Extender provides you with Wi-Fi connectivity using the 802.11a, b, g, n, ac or ax standards. These are the most common Wi-Fi standards.

802.11b has a maximum data rate of 11 Mbps, 802.11a and 802.11g have a maximum data rate of 54 Mbps, 802.11n has a maximum data rate of 300 Mbps, 802.11ac has a maximum data rate of 866 Mbps, and 802.11ax has a maximum data rate of 4.8 Gbps.

802.11b and g standards operate in the 2.4 GHz range. 802.11ac operates in the 5 GHz range. 802.11n and ax operate in the 2.4 GHz, 5 GHz and 6 GHz ranges.

Note: 802.11a, 802.11b are legacy modes and are not recommended. Even one such device connected to the network will slow your entire Wi-Fi network.

3.1/ PRIMARY NETWORK

You can view the security settings for 2.4 GHz, 5 GHz or 6 GHz of your Wi-Fi network.

Self-Organizing Network (SON) Wi-Fi Enabled - allows for smart roaming to provide reliable Wi-Fi network with full signal strength in all areas.

verizon

Network Device: Wi-Fi Extender Mini

Home

Wi-Fi

- Primary Network
- Guest Network
- IoT Network
- Wi-Fi Protected Setup
- Channel Management

Status

Advanced

Wi-Fi > Primary Network

Primary Network

Apply Changes

Self-Organizing Network (SON)

Allow devices to move seamlessly between Wi-Fi bands and extenders, when connected. SON Enabled

Wi-Fi Name: Verizon_4G4YQT

Wi-Fi Password:

Wi-Fi Enabled

Security

Set encryption type used to secure the Wi-Fi traffic. WPA2/WPA3 mixed mode

Broadcast Wi-Fi network name (SSID)

Broadcast Wi-Fi name from router to Wi-Fi clients. Enabled

Device Access List

MAC authentication limits the Wi-Fi clients that can connect. [Edit list](#)

2.4 GHz Wi-Fi Enabled

verizon

Network Device: Wi-Fi Extender Mini

Home

Wi-Fi

- Primary Network
- Guest Network
- IoT Network
- Wi-Fi Protected Setup
- Channel Management

Status

Advanced

Wi-Fi > Primary Network

Primary Network

Apply Changes

Device Access List

MAC authentication limits the Wi-Fi clients that can connect. [Edit list](#)

2.4 GHz Wi-Fi Enabled

5 GHz Wi-Fi Enabled

Group Key

Update Group Key based on time interval used to update the WPA shared key. 259200 Enabled

Wi-Fi QoS (WMM)

Improves the quality of service (QoS) for voice, video, and audio streaming over Wi-Fi by prioritizing these data streams. Enabled

WMM Power Save

Improves battery life on mobile Wi-Fi devices such as smart phones and tablets by fine-tuning power consumption. Enabled

802.11 Mode

Limit or allow access to Wi-Fi network by technology type. Compatibility Mode (802...

Transmit Power

Adjusts power of Wi-Fi signal. 100

PRIMARY NETWORK

To view the Wi-Fi security settings:

1. Select **Wi-Fi** from the left pane and then click **Primary Network**.
2. To view the Wi-Fi security, click the setup ⚙️ button.


Comment: We recommend using the default settings unless otherwise directed.

- **Broadcast Wi-Fi network name (SSID)**

Enable or disable the Extender from broadcasting the Wi-Fi name to client devices.

- **Device Access List**

Enter Wi-Fi client MAC addresses to either allow or block them from accessing your Wi-Fi network.

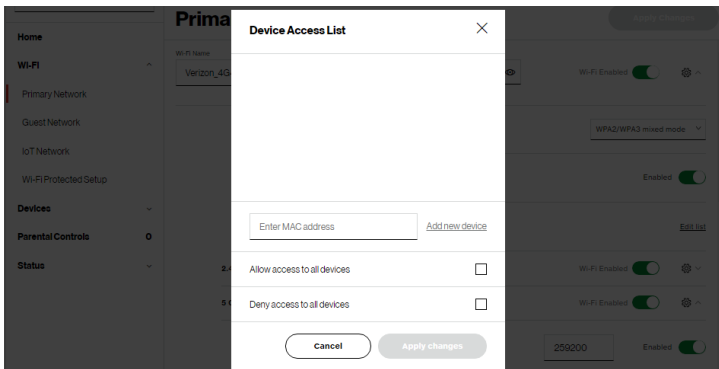

To view Wi-Fi MAC authentication: Click on **Edit List**.

- **Allow access to all devices** – allows the listed devices to access the Wi-Fi network.

***Warning:** This will block Wi-Fi network access for all devices not in the list. Only devices in the list will be able to connect to the Wi-Fi network.*

- **Deny access to all devices** – denies access to the listed devices. All other Wi-Fi devices will be able to access the Wi-Fi network if they use the correct Wi-Fi password.
- **Group key** - updates the WPA shared key.
- **Wi-Fi QoS (WMM)** - improves the quality of service (QoS) for voice, video, and audio streaming over Wi-Fi by prioritizing these data streams.
- **WMM Power Save** - improves battery life on mobile Wi-Fi devices such as smart phones and tablets by fine-tuning power consumption.
- **802.11 Mode**

From the 802.11 Mode section, you can view the Wi-Fi access to your network of the 2.4 GHz and 5 GHz Wi-Fi communication standard (mode) best suited or compatible with the devices you allow access to your Wi-Fi network.

The Wi-Fi mode:

- **Compatibility** – This is the default mode setting on 5 GHz, providing a good balance of performance and interoperability with existing Wi-Fi devices. 802.11a,n,ac and ax devices can connect.


GUEST NETWORK

- Legacy – This is the default mode setting on 2.4 GHz, providing broad connection support for old and new Wi-Fi devices. Only 802.11b,g and n devices can connect.
- 802.11n is available on both 2.4 GHz and 5 GHz frequencies.
- Connecting 802.11a or b devices will cause your Wi-Fi network to slow on that radio and is not recommended.
- When all changes are complete, click **Save Changes** to save the changes.
- **Transmit Power** – adjusts the power of the Wi-Fi signal.
- **6 GHz**

To activate the Wi-Fi 6 GHz frequency for the best Wi-Fi network performance, move the selector to **on** and select the connected devices that you allow access to your Wi-Fi network.

3.2/ GUEST NETWORK

The **Guest Network** is designed to provide internet connectivity to your guests but restricts access to your primary network and shared files. The primary network and the guest network are separated from each other through firewalls. **Guest Wi-Fi** can be managed using the Verizon Router's web interface. If you want to enable/disable your **Guest Wi-Fi** or to change the **Guest Wi-Fi SSID** (Name) or **Password**, please log into the Verizon Router's web interface for management.

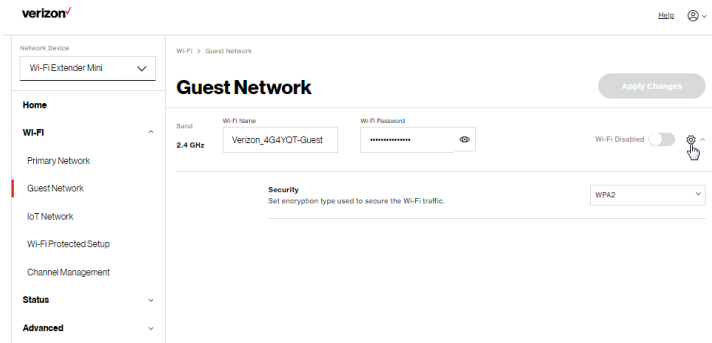


To view Guest Network settings:

Select **Wi-Fi** from the left pane and then click **Guest Network**.

3.3/ IOT NETWORK

The **IoT Network** is designed to provide an easier setup experience for your Internet of Things (IoT) devices which benefit from connecting to the 2.4 Ghz band while keeping your Primary Network settings unchanged. IoT devices and Primary devices can communicate unrestricted. IoT Wi-Fi can be managed using the Verizon Router's web interface. If you want to enable/disable your **IoT Wi-Fi** or to change the **IoT Wi-Fi SSID (Name)** or **Password**, please log into the Verizon Router's web interface for management.

WI-FI PROTECTED SETUP

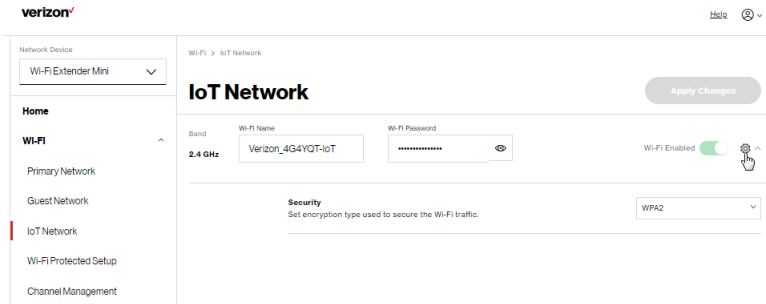

To view IoT Network Settings:

Select **Wi-Fi** from the left pane and then click **IoT Network**.

3.4/ WI-FI PROTECTED SETUP

Wi-Fi Protected Setup (WPS) is an easier way for many devices to set up a secure Wi-Fi network connection. Instead of manually entering passwords or multiple keys on each Wi-Fi client, such as a laptop, printer, or external hard drive, your Mini Extender creates a secure Wi-Fi network.


In most cases, this only requires the pressing of two buttons – one on your Mini Extender and one on the Wi-Fi client. This could be either a built-in button or one on a compatible Wi-Fi adapter/card, or a virtual button in software. Once completed, this allows Wi-Fi clients to join your Wi-Fi network.

To initialize the WPS process, you can either press and hold the WPS button located on the side panel of your Mini Extender for more than two seconds or use the UI and press the on-screen button.

You can easily add Wi-Fi devices to your Wi-Fi network using the WPS option if your Wi-Fi device supports the WPS feature.

To access WPS using the user interface:

1. From the main menu, select **Wi-Fi** settings, then select **Wi-Fi Protected Setup (WPS)**.

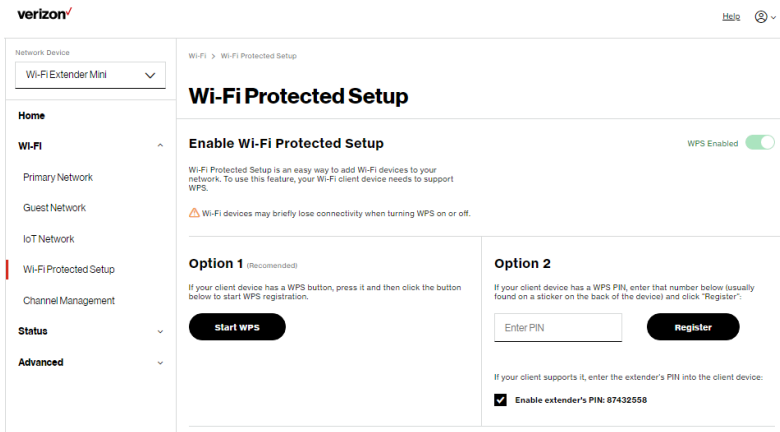

2. Use one of the following methods:
 - If your Wi-Fi client device has a WPS button, press the WPS button on your router for more than two seconds, then click the **start WPS** button in the **Option 1** to start the WPS registration process.
 - If your client device has a WPS PIN, locate the PIN printed on the client's label or in the client documentation. Enter the PIN number in the **Enter PIN** field. The **Client WPS PIN** field is located in the **Option 2** on the user interface.

WI-FI PROTECTED SETUP

- Click **Register**.
 - Alternatively, you can enter the router's PIN shown on this screen into the WPS user interface of your device, if this PIN mode is supported by your Wi-Fi device.
3. After pressing the WPS button on your Mini Extender, you have two minutes to press the WPS button on the client device before the WPS session times out.

When the WPS button on your Mini Extender is pressed, the Status LED on the front of your Mini Extender begins flashing blue. The flashing continues until WPS pairing to the client device completes successfully. At this time, the Status LED turns solid white.

If WPS fails to establish a connection to a Wi-Fi client device within two minutes, the Status LED on your Mini Extender flashes red for two minutes to indicate the WPS pairing process was unsuccessful. After flashing red, the light returns to solid white to indicate that Wi-Fi is on.

***Note:** Wi-Fi Protected Setup (WPS) cannot be used if WPA3 security is enabled or SSID broadcast is disabled or if MAC address authentication is enabled with an empty white list.*

3.5/ CHANNEL SETTINGS

You can configure the channel settings for either 2.4 GHz or 5 GHz of your Wi-Fi network.

The screenshot displays the Verizon Wi-Fi Channel Settings interface. On the left, a sidebar lists various network settings, with 'Channel Settings' highlighted. The main panel is titled 'Channel Settings' and includes a 'Settings' button (circled in red) and a 'Perform Scan' button. The interface shows two charts: 'Channel Score' and 'Channel Analysis'. The 'Channel Score' chart displays scores for channels 1 through 11, with channel 11 showing the highest score. The 'Channel Analysis' chart shows signal strength for channels 1 through 14. Below the charts, there are three configuration rows for different frequency bands: 2.4 GHz, 5 GHz, and 6 GHz. Each row includes dropdown menus for 'Band', 'Channel', and 'Width', along with a 'Health' indicator and a 'Save' button.

To view and configure the channel settings:

1. Select **Channel Settings** in the **Wi-Fi** section.
2. Click on **Settings** on the top right-hand side of the **Channel Settings** page to configure the channel scan settings:

The screenshot shows a 'Scan Settings' dialog box overlaid on the Channel Settings page. The dialog box has a title bar with 'Scan Settings' and a close button. It contains two checkboxes: 'Keep my channel selection during power cycle' and 'Enable DFS channels during channel scan', both of which are checked. At the bottom, there are 'Cancel' and 'Apply Changes' buttons.

CHANNEL SETTINGS

- Select the **Keep my channel selection during power cycle** check box to save your channel selection when your Mini Extender is rebooted.
 - **Enable DFS channels during channel scan:** DFS channels are enabled by default during channel scans.
3. Click **Perform Scan** to perform channel availability scan for the Mini Extender accommodating the best radio channel and providing the best Wi-Fi performance.
 4. On the **Channel Settings** page for 2.4 GHz, 5 GHz or 6 GHz, the following information displays and can be configured:
 - **Channel Score** - displays a network congestion score of one to ten in each Wi-Fi channel. It can be used to determine which channels to use or to avoid. Higher score indicates less congestion in a channel.
 - **Channel Analysis** - scans and displays channel bandwidth and signal strength of available APs.
 - **Channel** - this is the radio channel used by the Wi-Fi router and its clients to communicate with each other. The channel must be the same on the router and all of its Wi-Fi clients. Select the channel you want the Wi-Fi radio to use to communicate, or accept the default (**Auto**) channel selection. Then the router will automatically assign itself a radio channel.
 - **Width** - displays the Wi-Fi channel currently in use on each band. Users can select from available channels.

To view the channel settings history:

1. Select **Channel Settings** in the **Wi-Fi** section.
2. Click on **History** to display the channel settings history.

The screenshot shows the Verizon Wi-Fi settings interface. On the left is a navigation menu with categories: Home, Wi-Fi (expanded), Status, and Advanced. Under Wi-Fi, 'Channel Management' is selected. The main content area is titled 'Channel Management' and has two tabs: 'Settings' and 'History' (which is active). Below the tabs is a table with the following data:

Band	Channel	Time	Date
2.4 GHz	Ch. 11	12:30am	01 / 01 / 26
2.4 GHz	Ch. 1	12:00am	01 / 01 / 26
2.4 GHz	Ch. 11	01:23am	01 / 01 / 26
5 GHz	Ch. 132	01:22am	01 / 01 / 26
5 GHz	Ch. 133	01:03am	01 / 01 / 26
2.4 GHz	Ch. 6	12:30am	01 / 01 / 26
5 GHz	Ch. 144	12:03am	01 / 01 / 26

04 /

CONFIGURING ADVANCED SETTINGS

- 4.0** Using Advanced Settings
- 4.1** Reboot
- 4.2** Users
- 4.3** Factory Default
- 4.4** System Logging

Advanced settings cover a wide range of sophisticated configurations for your Wi-Fi Extender Mini's security and system logs.

USING ADVANCED SETTINGS

Caution: Many of the settings described in this section should only be configured by experienced network technicians. Changes could adversely affect the operation of your Wi-Fi Extender Mini and local network.

4.0/ USING ADVANCED SETTINGS

You can access the following advanced settings:


- Reboot - restarts your Wi-Fi Extender Mini.
- Users - sets the password for administrator access.
- Factory Default - resets your Wi-Fi Extender Mini to its default settings.
- System Logging
 - System Log - view the most recent activity of your Wi-Fi Extender Mini.
 - Advanced Log - view a summary of the monitored data collected for Wi-Fi Extender Mini.
 - DHCP Log - view a list of all DHCP clients connected to your Verizon Router.
 - BHM Log - view a summary of the monitored backhaul modes of Wi-Fi Extender Mini.

4.1/ REBOOT

You can reboot your Wi-Fi Extender Mini using the Reboot feature. Refer to 1.3b/ REAR PANEL for power reset button option.

To reboot your Wi-Fi Extender Mini using the user interface:

1. Select **Advanced** from the left pane and then click **Reboot**.

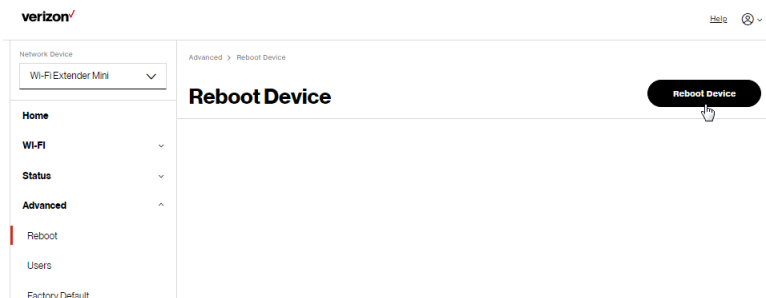

2. Click **Reboot Device** button on the screen. Your Extender will reboot. This may take up to a minute.
3. To access your Wi-Fi Extender Mini user interface, refresh your web browser.
4. After the front panel Status LED turns solid white, you will automatically be sent to the web browser login page.


USERS

4.2/ USERS

The Wi-Fi Extender Mini clones the **Users** password of the Verizon Router. Use the login password of the Verizon Router for managing your Extender settings. If you want to change your password, please log in the Verizon Router's web interface and go to **Advanced/Utilities/ Users** page to make changes.

*To view the **Users** password:*

Select **Users** in the **Advanced** section.

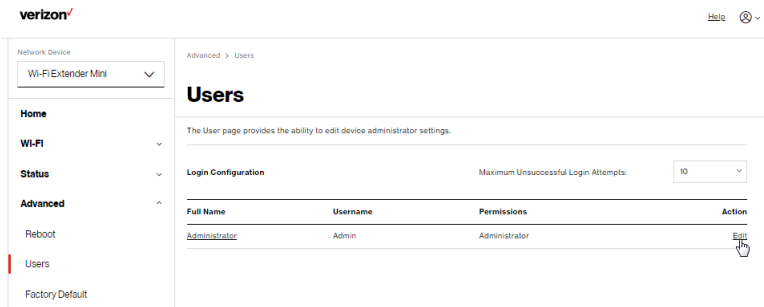

The screenshot shows the Verizon web interface for a Wi-Fi Extender Mini. The top left features the Verizon logo and a 'Hello' button. The top right has a 'Help' icon. The main content area is titled 'Users' and includes a breadcrumb 'Advanced > Users'. Below the title, there is a description: 'The User page provides the ability to edit device administrator settings.' A 'Login Configuration' section shows 'Maximum Unsuccessful Login Attempts' set to 10. A table lists the administrator user with an 'Edit' link.


Full Name	Username	Permissions	Action
Administrator	Admin	Administrator	Edit

4.3/ FACTORY DEFAULT

You can restore the configuration settings to the factory default settings for your Wi-Fi Extender Mini. Restoring the default settings erases the current configuration, including user defined settings and network connections.

To restore your Wi-Fi Extender Mini's factory default settings:

1. Select **Factory Default** in the **Advanced** section.

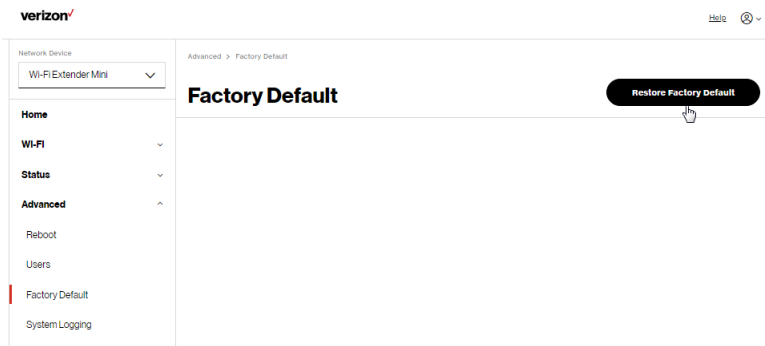

2. Click **Restore Factory Default** button. The factory default settings are applied and your Wi-Fi Extender Mini restarts. Once complete, the Login page for the First Time Easy Setup Wizard displays.

SYSTEM LOGGING

4.4/ SYSTEM LOGGING

4.4a/ System Log

System Log provides a view of the most recent activity of your Wi-Fi Extender Mini.

To view the system log:

1. Select System Logging in the Advanced section.

verizon

Advanced > System Logging > System Log

Options Refresh Save

System Logging

System Log Advanced Log DHCP Log BHM Log

Time	Event type	Log Level	Details
2026 Jan 1 00:14:25	CME1000	notice	[SYS] LED dim on/led pattern:)
2026 Jan 1 00:14:00	CME1000	notice	[SYS] LED dim on/led pattern:)
2026 Jan 1 00:02:17	arc_wlsta_monitor	info	[WiFi.6][SYS] ACTION=de-assoc, WLAN=eth22, phy rate=0 Mbps, txop=99
2026 Jan 1 00:02:17	arc_wlsta_monitor	info	[WiFi.6][SYS] ACTION=de-assoc, WLAN=eth22, MAC=fe69:42:f7:a793, RSSI=0, RATE=0 Mbps
2026 Jan 1 00:02:17	arc_wlsta_monitor	info	[WiFi.6][SYS] ACTION=assoc, WLAN=eth22, phy rate=0 Mbps, txop=99
2026 Jan 1 00:02:17	arc_wlsta_monitor	info	[WiFi.6][SYS] ACTION=assoc, WLAN=eth22, MAC=92:5a:85:fc:c5:69, RSSI=-30, RATE=3843 Mbps
2026 Jan 1 00:01:03	arc_wlsta_monitor	info	[WiFi.6][SYS] ACTION=assoc, WLAN=eth22, phy rate=0 Mbps, txop=100
2026 Jan 1 00:01:03	arc_wlsta_monitor	info	[WiFi.6][SYS] ACTION=assoc, WLAN=eth22, MAC=fe69:42:f7:a793, RSSI=0, RATE=0 Mbps
2026 Jan 1 00:00:01	sysup	info	[SYS.6][SYS] system startup
2026 Jan 1 00:00:01	sysup	info	[SYS.6][SYS] Reboot by Power Cycle/Software Fault Induced
2026 Jan 1 05:37:24	arc_wlsta_monitor	info	[WiFi.6][SYS] ACTION=de-assoc, WLAN=eth22, phy rate=0 Mbps, txop=99
2026 Jan 1 05:37:24	arc_wlsta_monitor	info	[WiFi.6][SYS] ACTION=de-assoc, WLAN=eth22, MAC=fe69:42:f7:a793, RSSI=0, RATE=0 Mbps
2026 Jan 1 05:37:24	arc_wlsta_monitor	info	[WiFi.6][SYS] ACTION=assoc, WLAN=eth22, phy rate=0 Mbps, txop=99
2026 Jan 1 05:37:24	arc_wlsta_monitor	info	[WiFi.6][SYS] ACTION=assoc, WLAN=eth22, MAC=92:5a:85:fc:c5:69, RSSI=-28, RATE=3843 Mbps

- To view logged events for a specific timeframe, click the **Options** button.

The screenshot shows the Verizon System Logging configuration interface. On the left is a navigation menu with options: Home, WI-FI, Status, Advanced, Reboot, Users, Factory Default, and System Logging. The main content area is titled "System Logging" and includes sub-tabs for System Log, Advanced Log, DHCP Log, and BHM Log. Under "Log viewing options", there are three radio buttons: "Past day", "Past week", and "Custom range". The "Custom range" option is selected. Below this, there are four input fields: "Start Date" (01/01/26), "Start Time" (12:00 am), "End Date" (01/01/26), and "End Time" (12:00 am). At the bottom are "Cancel" and "Save" buttons.

- To refresh the page, click **Refresh**.
- To delete the log information, click **Clear**.
- To save the log information, click **Save**.

SYSTEM LOGGING

4.4b/ Advanced Log

You can view a summary of the monitored data collected for your Wi-Fi Extender Mini.

To view your Wi-Fi Extender Mini's full system status and traffic monitoring data:

1. Select **System Logging** in the **Advanced** section.
2. Click on the **Advanced Log** from the top of the **System Logging** page.

verizon

Advanced > System Logging > Advanced Log

System Logging

Options Refresh Save

Time	Event type	Log Level	Details
2026 Jan 1 01:25:49	arc_wlsta_monitor	info	[WiFi6][ADV] WLAN+ath2, phy rate=0 Mbps, txop=99
2026 Jan 1 01:25:49	arc_wlsta_monitor	info	[WiFi6][ADV] WLAN+ath1, phy rate=0 Mbps, txop=21
2026 Jan 1 01:25:49	arc_wlsta_monitor	info	[WiFi6][ADV] WLAN+ath0, phy rate=1 Mbps, txop=98
2026 Jan 1 01:25:43	arc_cloud	warning	[CLOUD4][ADV] cloud test link failed, try again
2026 Jan 1 01:25:43	arc_cloud	err	[CLOUD3][ADV] curl_easy_perform() failed(6) Error.
2026 Jan 1 01:24:02	arc_cloud	warning	[CLOUD4][ADV] cloud test link failed, try again
2026 Jan 1 01:24:02	arc_cloud	err	[CLOUD3][ADV] curl_easy_perform() failed(6) Error.
2026 Jan 1 01:22:45	arc_acsd	info	[WiFi6][ADV] insert wifi0 acs scan last BSS to database
2026 Jan 1 01:22:45	arc_acsd	info	[WiFi6][ADV] insert wifi0 CBS scan score data to database
2026 Jan 1 01:22:45	arc_acsd	info	[WiFi6][ADV] ARC ACS0 wifi0 receive event.B2 ARC_EVENT_WLAN_CBS_SCAN_COMPLETE
2026 Jan 1 01:22:18	arc_cloud	warning	[CLOUD4][ADV] cloud test link failed, try again
2026 Jan 1 01:22:18	arc_cloud	err	[CLOUD3][ADV] curl_easy_perform() failed(6) Error.
2026 Jan 1 01:22:13	arc_acsd	info	[WiFi6][ADV] insert wifi1 acs scan last BSS to database
2026 Jan 1 01:22:13	arc_acsd	info	[WiFi6][ADV] insert wifi1 CBS scan score data to database
2026 Jan 1 01:22:13	arc_acsd	info	[WiFi6][ADV] ARC ACS0 wifi1 receive event.B2 ARC_EVENT_WLAN_CBS_SCAN_COMPLETE

3. To view logged events for a specific timeframe, click the **Options** button.
4. To refresh the page, click **Refresh**.

5. To delete the log information, click **Clear**.
6. To save the log information, click **Save**.

4.4c/ DHCP Log

You can view a list of the connected DHCP clients on your network.

To view a list of the connected DHCP clients *status*:

1. Select **System Logging** in the **Advanced** section.
2. Click on the **DHCP Log** from the top of the **System Logging** page.

The screenshot shows the Verizon System Logging interface. The left sidebar contains navigation options: Home, Wi-Fi, Status, Advanced, Reboot, Users, Factory Default, and System Logging. The main content area is titled 'System Logging' and includes tabs for System Log, Advanced Log, DHCP Log (selected), and BHM Log. A table displays DHCP events with columns for Time, Event type, Log Level, and Details. The table contains 14 rows of log entries. At the top right of the table area are buttons for 'Options', 'Refresh', and 'Save'. A 'Clear' button is located at the top right of the table.

Time	Event type	Log Level	Details
2026 Jan 1 00:02:15	dhclient	info	[WDHCP] bound to 192.168.1.101 -- renewal in 38487 seconds.
2026 Jan 1 00:02:15	dhclient	info	[WDHCP] DHCPACK of 192.168.1.101 from 192.168.1.1
2026 Jan 1 00:02:15	dhclient	info	[WDHCP] DHCPREQUEST for 192.168.1.101 on br-lan to 255.255.255.255 port 67
2026 Jan 1 00:02:15	dhclient	info	[WDHCP] DHCPDISCOVER for 192.168.1.101 from 192.168.1.1
2026 Jan 1 00:02:15	dhclient	info	[WDHCP] DHCPDISCOVER on br-lan to 255.255.255.255 port 67 interval 7
2026 Jan 1 00:02:30	dhclient	info	[WDHCP] bound to 192.168.1.101 -- renewal in 41136 seconds.
2026 Jan 1 00:02:30	dhclient	info	[WDHCP] DHCPACK of 192.168.1.101 from 192.168.1.1
2026 Jan 1 00:02:30	dhclient	info	[WDHCP] DHCPREQUEST for 192.168.1.101 on br-lan to 255.255.255.255 port 67
2026 Jan 1 00:02:30	dhclient	info	[WDHCP] DHCPDISCOVER for 192.168.1.101 from 192.168.1.1
2026 Jan 1 00:02:30	dhclient	info	[WDHCP] DHCPDISCOVER on br-lan to 255.255.255.255 port 67 interval 6
2026 Jan 1 00:01:09	dhclient	info	[WDHCP] bound to 192.168.1.101 -- renewal in 55394943 seconds.
2026 Jan 1 00:01:08	dhclient	info	[WDHCP] DHCPACK of 192.168.1.101 from 192.168.1.1
2026 Jan 1 00:01:08	dhclient	info	[WDHCP] DHCPREQUEST for 192.168.1.101 on br-lan to 255.255.255.255 port 67

3. To view logged events for a specific timeframe, click the **Options** button.

SYSTEM LOGGING


4. To refresh the page, click **Refresh**.
5. To delete the log information, click **Clear**.
6. To save the log information, click **Save**.

4.4d/ BHM Log

You can view a summary of the BHM (backhaul modes: Ethernet, coax and Wi-Fi) status of your Wi-Fi Extender Mini.

To view the backhaul modes log:

1. Select **System Logging** in the **Advanced** section.
2. Click on the **BHM Log** from the top of the **System Logging** page.

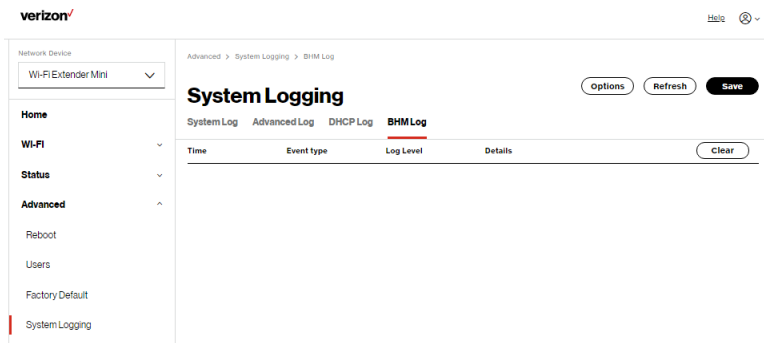

3. To view logged events for a specific timeframe, click the **Options** button.
4. To refresh the page, click **Refresh**.
5. To delete the log information, click **Clear**.
6. To save the log information, click **Save**.

05 /

TROUBLE SHOOTING

5.0 Troubleshooting Tips

5.1 Frequently Asked Questions

This chapter lists solutions for issues that may be encountered while using your Wi-Fi Extender Mini as well as frequently asked questions.

Although the majority of the Wi-Fi Extender Mini's LAN and internet connectivity is automatic and transparent, if an issue does occur accessing the internet (e.g. complete loss of connectivity, inability to access services, etc.), you may need to take additional steps to resolve the problem.

TROUBLESHOOTING TIPS

Note: The advanced settings should only be configured by experienced network technicians to avoid adversely affecting the operation of your Wi-Fi Extender Mini and your local network.

5.0/ TROUBLESHOOTING TIPS

5.0a/ IF YOU ARE UNABLE TO CONNECT TO THE INTERNET:

- The first thing to check is whether your Wi-Fi Extender Mini is powered on and is connected to the Verizon Router. Check the Status LED on the front of the Wi-Fi Extender Mini. Be sure to refer to the “1.3a/ FRONT PANEL” on page 7 to determine status of the Wi-Fi Extender Mini. Check the WAN cable (Ethernet or coaxial) connecting your Verizon Router to the internet to make sure it is properly connected on both ends.
- If the prior tips do not resolve your connection issue, try restarting (rebooting) the Wi-Fi Extender Mini by manually pressing the ‘red’ reset button on the side panel of the Wi-Fi Extender Mini for 2-4 seconds (the Status LED should go off) to begin rebooting your Wi-Fi Extender Mini. Your Wi-Fi Extender Mini will begin rebooting and will return to service in 3 - 5 minutes depending on your network connection. Check Status LED and if it is solid white, try again to access the internet.
- If rebooting your Wi-Fi Extender Mini does not resolve your connection issue, try power cycling the Extender by unplugging the Extender from the power socket and wait 2 minutes. During the 2 min. wait period, also power cycle the network device (e.g.

the computer, tablet, etc.) and then plug the Extender back into the power socket. After 3-5 minutes, recheck the Status LED and try again to access the internet.

5.0b/ IF YOU ARE UNABLE TO CONNECT TO YOUR WI-FI EXTENDER MINI USING WI-FI:

- Be sure your Wi-Fi device is within range of your Wi-Fi Extender Mini; move it closer to see if your connection improves.
- Check your network device's Wi-Fi settings to be sure your device's Wi-Fi is on (enabled) and that you have the correct Wi-Fi network and password (if using a Wi-Fi password) as configured on your Wi-Fi Extender Mini.
- Be sure you are connecting to the correct Wi-Fi network; check to be sure you are using your Wi-Fi Extender Mini's SSID. In some cases, if using a Wi-Fi password, you may need to enter the Wi-Fi password into your network device again to be sure your device accepts the password.
- Check to be sure you are running the latest software for your network device.
- Try turning your network device's Wi-Fi off and on, and try to connect.
- If you have made any changes in your network settings and turning your network device's Wi-Fi off and on does not help, try to restart your network device.

TROUBLESHOOTING TIPS

- You may need to turn the Wi-Fi settings from on to off, and back to on again and apply the changes.
- If you are still unable to access your Wi-Fi Extender Mini, you may need to try connecting to the Extender using another network device. If the issue goes away with another network device, the issue is likely with that individual network device's configuration.

5.0c/ ACCESSING YOUR WI-FI EXTENDER MINI IF YOU ARE LOCKED OUT

- If your Wi-Fi Extender Mini connection is lost while making configuration changes, a setting that locks access to your Wi-Fi Extender Mini's UI may have inadvertently been activated.

The common ways to lock access to your Wi-Fi Extender Mini are:

- Scheduler - If a schedule has been created that applies to the computer over the connection being used, your Wi-Fi Extender Mini will not be accessible during the times set in the schedule.
- Access Control - If the access control setting for the computer is set to block the computer, access to your Wi-Fi Extender Mini is denied.

To gain access, restore the default settings to your Extender.

5.0d/ RESTORING YOUR WI-FI EXTENDER MINI'S DEFAULT SETTINGS

There are two ways to restore your Wi-Fi Extender Mini's default settings. It is important to note that after performing either procedure, all previously saved settings on your Wi-Fi Extender Mini will be lost.

- Using the tip of a ballpoint pen or pencil, press and hold the Reset button on the side panel of your Wi-Fi Extender Mini for at least ten seconds.
- Access the UI and navigate to the Advanced Settings page. Select Factory Default option. Click the Restore Default Settings button. For additional details, refer to the section 4.3/ Factory Default section of this guide.

Note: If you reset or reboot your Wi-Fi Extender Mini, you may also need to disconnect your Wi-Fi Extender Mini's power supply for a few minutes (3 or more) and then reconnect the power.

5.0e/ LAN CONNECTION FAILURE

To troubleshoot a LAN connection failure:

- Verify your Wi-Fi Extender Mini is properly installed, LAN connections are correct, and that the Wi-Fi Extender Mini and communicating network devices are all powered on.
- Confirm that the computer and Wi-Fi Extender Mini are both on the same network segment.

TROUBLESHOOTING TIPS

If unsure, let the computer get the IP address automatically by initiating the DHCP function, then verify the computer is using an IP address within the default range of 192.168.1.2 through 192.168.1.254. If the computer is not using an IP address within the correct IP range, it will not connect to your Wi-Fi Extender Mini.

- Verify the subnet mask address is set to 255.255.255.0.

5.0f/ TIMEOUT ERROR OCCURS WHEN ENTERING THE URL OR IP ADDRESS

Verify the following:

- All computers are working properly.
- IP settings are correct.
- Wi-Fi Extender Mini is on and connected properly.

For connections experiencing lag or a slow response:

- Check for other devices on the network utilizing large portions of the bandwidth and if possible temporarily stop their current utilization and recheck the connection.
- If lag still exists, clear the cache on the computer and if still needed, unplug the Ethernet cable or disable the Wi-Fi connection to the computer experiencing the slow connection and then reconnect or enable the Wi-Fi connection and try the connection again.

In rare cases you may also need to:

- Under limited circumstances you may use a port forwarding configuration on the Verizon Router, based on the application you are using (refer to Verizon's support online help for more details).

5.0g/ FRONT STATUS LED

The Status LED provides a visual display of the Wi-Fi Extender Mini's current condition. Refer to the chart below for details.

Condition Status	LED Color	Wi-Fi Extender Mini
Normal	WHITE	Normal operation (solid) Router is booting. (fast blink)
	BLUE	Pairing mode (slow blink) Pairing successful (solid)
	GREEN	Wi-Fi has been turned off. (solid)
Issue(s)	YELLOW	No internet connection (solid) Extender is too far from the Router. Poor backhaul signal (slow blink) Extender is too close to the Router. Poor Wi-Fi coverage (fast blink)
	RED	Hardware/System failure detected (solid) Overheating (fast blink) Pairing Failure (slow blink)
Power	OFF	Power off

FREQUENTLY ASKED QUESTIONS

5.1/ FREQUENTLY ASKED QUESTIONS

5.1a/ IS THE WI-FI OPTION ON BY DEFAULT ON MY WI-FI EXTENDER MINI?

Yes, your Wi-Fi Extender Mini's Wi-Fi option is activated out of the box.

5.1b/ IS THE WI-FI SECURITY ON BY DEFAULT WHEN THE WI-FI OPTION IS ACTIVATED?

Yes, with the unique WPA2 (Wi-Fi Protected Access II) key that is printed on the sticker on the rear panel of the router.

5.1c/ CAN I USE AN OLDER WI-FI DEVICE TO CONNECT TO MY WI-FI EXTENDER MINI?

Yes, your Wi-Fi Extender Mini can interface with 802.11a, b, g, n, ac or ax devices. Your Wi-Fi Extender Mini also can be setup to handle only n Wi-Fi cards, g Wi-Fi cards, b Wi-Fi cards, or any combination of the three.

5.1d/ CAN MY WI-FI SIGNAL PASS THROUGH FLOORS, WALLS, AND GLASS?

The physical environment surrounding your Wi-Fi Extender Mini can have a varying effect on signal strength and quality. The denser the object, such as a concrete wall compared to a

plaster wall, the greater the interference. Concrete or metal reinforced structures experience a higher degree of signal loss than those made of wood, plaster, or glass.

5.1e/ HOW DO I LOCATE THE IP ADDRESS THAT MY COMPUTER IS USING?

In Windows 7 or Windows 10, click the Windows button and select Control Panel, then click View Network Status and Tasks. In the next window, click Local Area Connection. In the Local Area Network Connection Status window, click Details.

On Mac OS X, open System Preferences and click the Network icon. The IP address displays near the top of the screen.

5.1f/ I CANNOT ACCESS MY WI-FI EXTENDER MINI UI. WHAT SHOULD I DO?

If you cannot access the UI, verify the computer connected to your Wi-Fi Extender Mini is set up to dynamically receive an IP address.

06 /

SPECIFICATIONS

- 6.0** General Specifications
- 6.1** LED Indicators
- 6.2** Environmental Parameters

The specifications for your
Wi-Fi Extender Mini are as follows.

This includes standards, cabling types
and environmental parameters.

GENERAL SPECIFICATIONS

Note: The specifications listed in this chapter are subject to change without notice.

6.0/ GENERAL SPECIFICATIONS

Model Number:	CME1000
Standards:	IEEE 802.11a/b/g/n/ac/ax
IP:	IP versions 4 and 6
Firewall:	ICSA certified

6.1/ LED INDICATORS

Front Panel:	Unified Button
--------------	----------------

6.2/ ENVIRONMENTAL PARAMETERS

DIMENSIONS AND WEIGHT

Wi-Fi Extender Mini (unit only):

Size: 3.39" wide x 5.71" high x 2.10" deep

Weight: 0.75 lbs/0.34kg

Complete System (inc. packaging):

Size: 5.37" wide x 8.03" high x 3.66" deep

Weight: 1.27 lbs/0.575 kg

Power Input Range:	100~240VAC, 50/60Hz
Certifications:	FCC, Wi-Fi Alliance, UL 62368-1
Operating Temperature:	0° C to 40° C (32° F to 104° F)
Storage Temperature:	-20° C to 80° C (-4° F to 176° F)
Operating Humidity:	5% to 95%
Storage Humidity:	5% to 95% (non-condensing)

07/

NOTICES

7.0 Regulatory Compliance Notices

This chapter lists various compliance and modification notices, as well as the NEBS requirements and GPL.

REGULATORY COMPLIANCE NOTICES

7.0/ REGULATORY COMPLIANCE NOTICES

7.0a/ Class B Equipment

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

-
- (1) This device may not cause harmful interference, and
 - (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

RF Exposure:

To comply with FCC RF exposure compliance requirements, the antenna used for this transmitter must be installed to provide a separation distance of at least 31cm from all persons (indoor), and must not be co-located or operating in conjunction with any other antenna or transmitter.

2.4GHz operation of this product in the U.S.A. is firmware-limited to channels 1 through 11.

This device is restricted for indoor use.

The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet.

Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.

REGULATORY COMPLIANCE NOTICES

7.0b/ Safety Warning:

1. The circuit of cable distribution system under consideration is TNV-1 circuit.
2. The common sides or earthed side of the circuit are connected to the screen of the coaxial cable through an antenna connector of tuner and to all accessible parts and circuits (SELV, LCC and accessible metal parts).
3. The screen of the coaxial cable is intended to be connected to earth in the building installation.

7.0c/ Alerte de sécurité:

1. Le circuit de distribution par câble considéré est le circuit TNV-1.
2. Les côtés communs ou côté terre du circuit sont connectés à l'écran du câble coaxial via un connecteur d'antenne du syntoniseur et à toutes les parties et circuits accessibles (SELV, LCC et parties métalliques accessibles).
3. L'écran du câble coaxial est destiné à être mis à la terre dans l'installation du bâtiment.

The cable distribution system should be grounded (earthed) in accordance with ANSI/NFPA 70, the National Electrical Code (NEC), in particular Section 820.93, Grounding of Outer Conductive Shield of a Coaxial Cable.

Le système de distribution par câble doit être mis à la terre conformément à ANSI / NFPA 70, Code national de l'électricité (NEC), en particulier à la section 820.93, Mise à la terre du blindage conducteur extérieur d'un câble coaxial.

7.0d/ NEBS (Network Equipment Building System) Statement

An external SPD is intended to be used with CR1000A/CME1000.

WARNING: The intra-building ports of the equipment or subassembly is suitable for connection to intra-building or unexposed wiring or cabling only. The intra-building port(s) of the equipment or subassembly **MUST NOT** be metallically connected to interfaces that connect to the OSP or its wiring. These interfaces are designed for use as intra-building interfaces only (Type 4 ports as described in GR-1089) and require isolation from the exposed OSP cabling. The addition of Primary Protectors is not sufficient protection in order to connect these interfaces metallically to OSP wiring.

REGULATORY COMPLIANCE NOTICES

Caution: The Wi-Fi Extender Mini must be installed inside the home. The Extender is not designed for exterior installation.

7.0e/ GENERAL PUBLIC LICENSE

This product includes software made available under open source licenses. Additional information about that software, applicable licenses, and downloadable copies of source code, is available at:

<https://verizon.com/opensource/>

All open source software contained in this product is distributed **WITHOUT ANY WARRANTY**. All such software is subject to the copyrights of the authors and to the terms of the applicable licenses included in the download.

This information is provided for those who wish to edit or otherwise change such programs. You do not need a copy of any of such open source software source code to install or operate the device.